

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 09792909-4681

First Named Inventor or Application Identifier

Etsushi Yajima

Express Mail Label No: EL654782678US

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Specification Total Pages 27
 2. ☒ Drawing(s) (35USC 113) Total Pages 9
 3. ☒ Declaration and Power of Attorney Total Pages 4
 - a. ☒ Unexecuted(original or copy)
 - b. ☐ Copy from prior application (37CFR 1.63(d))
(for continuation/divisional with Box 14 completed)
- [Note Box 4 Below]
- i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting Inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
 - ☐ Incorporation By Reference (usable if Box 3b is checked)
The entire disclosure of the prior application, from which copy of the oath or declaration is supplied under Box 3b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

ACCOMPANYING APPLICATION PARTS

5. ☐ Assignment Papers (cover sheet & documentation)
6. ☒ Letter under 37 CFR 1.41(c).
7. ☐ English Translation Document (if applicable)
8. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
9. ☒ Preliminary Amendment
10. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
11. ☐ Small Entity ☐ Statement filed in prior Application, Status still proper and desired
12. ☒ Certified copy of Japanese priority applications Nos. P11-318434 filed November 9, 1999

14. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) ☐ of prior application No:

CLAIMS AS FILED

	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) BASIC FEE
					\$710.00
TOTAL CLAIMS	20	24	4	18.00	72.00
INDEPENDENT CLAIMS	03	2		80.00	0.00
		ANY MULTIPLE DEPENDENT CLAIMS?			0.00
		<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			
			TOTAL FEE		\$782.00

- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with this application, or credit any overpayment to ACCOUNT NO. 19-3140. A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$782.00 to cover the filing fee is enclosed.

15. CORRESPONDENCE ADDRESS: David R. Metzger
SONNENSCHN NATH & ROSENTHAL
P.O. Box #061080
Wacker Drive Station, Sears Tower
Chicago, IL 60606-1080
Customer ID #26263
Telephone (312) 876-8000 - Fax (312) 876-7934


SIGNATURE

David R. Metzger (Reg. No. 32,819)

Date: November 8, 2000



EXPRESS MAIL #EL654782678US



CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" Mailing Label Number: EL654782678US

Date of Deposit: November 8, 2000

I hereby certify that this correspondence is being deposited with the United States Postal "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to The Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Applicant(s): Etsushi Yajima, et al.

Attorney Docket No. 09792909-4681

\$782.00 Filing Fee (24 claims-2 independent)

Drawings (9 sheets - Figs. 1-13)

Unexecuted Declaration

Letter Under Rule 37

Preliminary Amendment

Certified copy of Japanese priority application No. P11-318434

Return postcard



Signature of Person Mailing Application and Fees

09708911-110800

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

PRELIMINARY AMENDMENT ACCOMPANYING APPLICATION

APPLICANT: Etsushi Yajima, et al. ATTY. DOCKET NO. 09792909-4681

SERIAL NO.

DATE FILED:

INVENTION: "ELECTRODE AND GEL ELECTROLYTE CELL PRODUCTION METHOD"

Assistant Commissioner of Patents
Washington, D.C. 20231


S I R:

Between the title and the heading "Background of the Invention" on page 1, insert the following:

--RELATED APPLICATION DATA

The present application claims priority to Japanese Application No. P11-318434 filed November 9, 1999, which application is incorporated herein by reference to the extent permitted by law.

Respectfully submitted,



(Reg. No. 32,919)

David R. Metzger
SONNENSCHN NATH & ROSENTHAL
P.O. Box #061080
Wacker Drive Station
Sears Tower
Chicago, IL 60606-1080
Customer #26263

Attorneys for Applicant(s)

09792909-4681

Title of the Invention

Electrode and Gel Electrolyte Cell Production Method

Background of the Invention

Field of the Invention

The present invention relates to production method of an electrode including an electrode carrier and a gel electrolyte film formed on the electrode carrier and having a larger width than the electrode carrier and a production method of a gel electrolyte cell having such an electrode.

Description of the Prior Art

Recently various portable electronic apparatuses such as a tape recorder provided with a camera, a cellular telephone, and a portable computer are used and it has been desired to reduce their weight and size. Accordingly, it is also desired to reduce size and weight of cells used as a power source of these electronic apparatuses. To cope with this, a lithium-ion cell has been developed and industrialized. This cell uses a porous polymer separator impregnated in an electrolyte solution as the ion conductor between the positive electrode and negative electrode. In order to prevent leak of the electrolyte solution, the cell is packaged in a heavy metal package.

On the other hand, a great expectation is posed on a solid electrolyte cell using a solid electrolyte as the ion conductor between the positive electrode and negative

electrode which has no danger of liquid leak and can be placed in a simplified package to reduce the size and weight of the cell. Especially great attention is paid to a solid polymer electrolyte having lithium salt dissolved in a polymer and a gel-like solid electrolyte containing electrolyte in a matrix polymer (hereinafter, referred to as a gel electrolyte).

A gel electrolyte cell using such a gel electrolyte can be produced as follows.

Firstly, for the positive electrode, a positive electrode composite agent containing a positive electrode active material, conductive agent, and a binder is uniformly applied onto both surfaces of a positive electrode collector and dried so as to form a positive electrode active material layer, which is dried and pressed by a roll press so as to obtain a positive electrode sheet.

Next, for the negative electrode, a negative electrode composite agent containing a negative electrode active material and a binder is uniformly applied onto both surfaces of a negative electrode collector and dried to form a negative electrode active material layer, which is dried and pressed by a roll press so as to obtain a negative electrode sheet.

As for the gel electrolyte film, a sol electrolyte solution containing a non-aqueous solvent, electrolyte salt, and matrix polymer is uniformly applied onto both surfaces of the positive electrode sheet and the negative electrode sheet and dried to remove the solvent. Thus, a gel electrolyte film is formed on the positive electrode active material layer and the negative electrode active material layer.

The positive electrode sheet having the gel electrolyte film is, for example, cut into a strip. Furthermore, the gel electrolyte film and the positive electrode active material layer of the portion for a positive electrode lead welding is removed from the surface of the positive electrode collector, and the positive electrode lead is welded here, so as to obtain a strip positive electrode having the gel electrolyte film.

Moreover, the negative electrode sheet having the gel electrolyte film is, for example, cut into a strip. Furthermore, the gel electrolyte film and the negative electrode active material layer of the portion for a negative electrode lead welding is removed from the surface of the negative electrode collector, and the negative electrode lead is welded here, so as to obtain a strip negative electrode having the gel electrolyte film.

Lastly, the strip positive electrode and the strip negative electrode each having the gel electrolyte film are laid upon one another and the layered body is rolled in the longitudinal direction by several turns so as to obtain a rolled electrode body. This rolled electrode body is sandwiched by exterior films, whose outermost peripheries are heat-sealed under a reduced pressure so that the rolled electrode body is airtightly sealed in the exterior films to complete the gel electrolyte cell.

In the rolled type gel electrolyte secondary cell having the aforementioned configuration, the gel electrolyte film formed on the electrode surface is defined so as to have a larger width than the electrode so as to improve reliability of the operation of the cell.

In order to obtain the aforementioned width of the gel electrolyte film, various trials have been made to increase the dimensional accuracy of the gel electrolyte coating apparatus and the accuracy of the coating position. However, due to the gel viscosity fluctuations and the porosity and the surface roughness fluctuations of the electrode to which the gel electrolyte is to be applied, it is difficult to obtain a stable dimensional accuracy of the gel electrolyte film. The gel electrolyte film often has a too large width to be placed in a package when assembling the cell or too small width, causing a short circuit between the positive electrode and the negative electrode.

Moreover, in order to solve this problem, there is a method to form the gel electrolyte film having a sufficiently larger width than the electrode and then cut off an excessive portion of the gel electrolyte film using a roller cutter or removed using a brush or scraper. However, this has caused various problems such that a portion of the gel electrolyte film to be left is removed or a portion of the gel electrolyte film which has been cut off is mixed into the cell, lowering the yield.

Summary of the Invention

It is therefore an object of the present invention to provide an electrode production method and a gel electrolyte cell production method capable of forming a gel electrolyte film on the electrode with a stable high accuracy.

The electrode production method according to the present invention is for producing an electrode including a rectangular electrode carrier and a gel electrolyte

film formed on the electrode carrier and having a width greater than the electrode carrier, the method including: an overlaying step for overlaying a first carrier having a greater width than the gel electrolyte film, a second carrier having a width approximately identical to that of the gel electrolyte film, and the electrode carrier in this order; a coating step for applying an electrolyte composition onto the first carrier, the second carrier, and the electrode carrier which have been put upon one another, in such a manner that the applied electrolyte composition has a width greater than the width of the second carrier and smaller than the width of the first carrier; a first peel-off step for peeling off from the first carrier the second carrier and the electrode carrier coated with the gel electrolyte composition in the coating step and overlaid on each other; a gelatinization step for gelatinizing into a gel electrolyte film the electrolyte composition applied onto the second carrier and the electrode carrier which have been peeled off from the first carrier in the first peel-off step, and a second peel-off step for peeling off from the second carrier the gel electrolyte film and the electrode carrier.

In the aforementioned electrode production method according to the present invention utilizing the difference in adhesion between the first carrier, the second carrier, and the electrode carrier with the electrolyte composition or the gel electrolyte film, the gel electrolyte film is formed on the electrode carrier with a high accuracy without peeling off of the gel electrolyte film from the electrode carrier.

Moreover, the gel electrolyte cell production method uses an electrode including

Brief Description of the Drawings

Fig. 1 is a perspective view showing a configuration example of a solid electrolyte cell according to the present invention.

Fig. 2 is a cross sectional view about the line X-Y in Fig. 1.

Fig. 3 is a perspective view of a positive electrode and a negative electrode which are formed into a rolled electrode body.

Fig. 4 is a perspective view showing a configuration example of the positive electrode.

Fig. 5 is a perspective view showing a configuration example of the negative electrode.

Fig. 6 explains a gel electrolyte film formation method according to the present invention with a plan view of a flat plate, a carrier, and a positive electrode ribbon placed on one another.

Fig. 7 is a cross sectional view about the line X_1 - X_2 in Fig. 6.

Fig. 8 explains the gel electrolyte film formation method according to the present invention with plan view of an electrolyte solution applied to the flat plate, the carrier, and the positive electrode ribbon which are placed on one another.

Fig. 9 is a cross sectional view about the line X_3 - X_4 in Fig. 8.

Fig. 10 explains the gel electrolyte film formation method according to the present invention with a plan view showing a state after the carrier and the positive electrode ribbon are peeled off from the flat plate.

Fig. 11 is a cross sectional view about the line X_5 - X_6 in fig. 10.

Fig. 12 explains the gel electrolyte film formation method according to the present invention with a plan view showing a state after the positive ribbon is peeled off from the carrier.

Fig. 13 is a cross sectional view about the line X_7 - X_8 in Fig. 12.

Detailed Description of Preferred Embodiments

Description will now be directed to a preferred embodiment with reference to the attached drawings.

Fig. 1 and Fig. 2 show a configuration example of the gel electrolyte cell produced according to the present invention. The gel electrolyte cell 1 includes a strip positive electrode 2, a strip negative electrode 3 arranged to oppose to the positive electrode 2, and a gel electrolyte film 4 arranged between the positive electrode 2 and the negative electrode 3. The positive electrode 2 and the negative electrode 3 are layered via the gel electrolyte film 4 and rolled in the longitudinal direction to obtain a rolled electrode body 5 shown in Fig. 3, which is covered and sealed in an exterior film 6 made from an insulation material. The positive electrode 2 is provided with a positive electrode terminal 7 and the negative electrode 3 is provided with a negative electrode terminal 8. The positive electrode terminal 7 and the negative electrode terminal 8 protrude through the sealing portion of the peripheral portion of the exterior film 6.

As shown in Fig. 4, the positive electrode 2 includes a positive electrode active material layer 2a containing a positive electrode active material is formed on both sides of a positive electrode collector 2b. The positive electrode collector 2b, for example, is made from a metal foil such as an aluminum foil.

For the positive electrode active material, it is possible to use a composite oxide such as lithium cobaltate, lithium nickelate, lithium manganate whose portion is substituted by a transition metal, or a transition metal compound such as manganese dioxide and vanadium pentoxide, or a transition metal chalcogen compound such as iron sulfide.

It should be noted that Fig. 4 shows a gel electrolyte film 4a, which will be detailed later, formed on the positive electrode active material layer 2a of the positive electrode 2.

Moreover, as shown in Fig. 5, the negative electrode 3 includes a negative electrode active material layer 3a containing a negative electrode active material formed on a negative electrode collector 3b. The negative electrode collector 3b is formed, for example, from a metal foil such as a copper foil.

The negative electrode active material may be a material capable of doping and dedoping lithium. As the material capable of doping and dedoping lithium, there can be exemplified pyrocarbons, coke, acetylene black, other carbon black, graphite, glassy carbon, active carbon, carbon fiber, organic polymer sintered body, coffee beans sintered body, cellulose sintered body, bamboo sintered body, and other carbon

materials, lithium metal, lithium alloy, or polyacetylene, and other conductive polymers.

It should be noted that fig. 5 shows a gel electrolyte film 4b, which will be detailed later, formed on the negative active material layer 3a of the negative electrode 3.

The gel electrolyte film 4 contains an electrolyte salt, matrix polymer, and a swelling solvent as a plastic material.

For the electrolyte salt, it is possible to use LiPF_6 , LiAsF_6 , LiBF_4 , LiClO_4 , LiCF_3SO_3 , $\text{Li}(\text{CF}_3\text{SO}_2)_2\text{N}$, $\text{LiC}_4\text{F}_9\text{SO}_3$, and the like solely or in combination with others.

The matrix polymer is not limited to a particular chemical structure if it shows ion conductance not less than 1 mS/cm at room temperature. As this matrix polymer, for example, it is possible to use polyacrylonitrile, polyvinylidene fluoride, polytetrafluoroethylene, polyhexafluoropropylene, polyethylene oxide, polypropylene oxide, polyphosphazene, polysiloxane, polyvinyl acetate, polyvinyl alcohol, polymethyl methacrylate, polyacrylic acid, polymethacrylic acid, styrene-butadiene rubber, nitrile-butadiene rubber, polystyrene, polycarbonate, and the like.

The swelling solvent may be ethylene carbonate, propylene carbonate, butylene carbonate, γ -butyrolactone, γ -valerolactone, diethoxyethane, tetrahydrofuran, 2-methyl tetrahydrofuran, 1, 3-dioxane, methyl acetate, methyl propionate, dimethyl carbonate, diethyl carbonate, ethylmethyl carbonate, and other non-aqueous solvents. Each of these can be used solely or in combination with others.

Here, as shown in Fig. 4, in the gel electrolyte cell 1 according to the present embodiment, the gel electrolyte film 4a is formed on the positive electrode active material layer 2a of the positive electrode 2 so as to have a larger width than the positive electrode 2. Moreover, as shown in Fig. 5, the gel electrolyte film 4b is formed on the negative electrode active material layer 3a of the negative electrode 3 so as to have a larger width than the negative electrode 3. In this gel electrolyte cell 1, as shown in Fig. 2 and Fig. 3, the positive electrode 2 and the negative electrode 3 are layered via the gel electrolyte film 4 and rolled in the longitudinal direction so as to obtain the rolled electrode body 5.

Next, explanation will be given on a production method of such a gel electrolyte cell 1.

Firstly, for the positive electrode 2, a positive electrode composite agent containing a positive electrode active material and a binder is uniformly applied on a metal foil such as an aluminum foil to serve as the positive electrode collector 2b and dried so as to obtain a positive electrode active material layer 2a. Thus, a positive electrode sheet is ready. The binder contained in the positive electrode composite agent may be selected from known binders with or without addition of known additives. The positive electrode sheet having the positive electrode active material layer 2a is cut into a predetermined width to obtain a positive electrode ribbon.

Next, the gel electrolyte film 4a is formed on the positive electrode active material layer 2a of the positive electrode ribbon. In order to form the gel electrolyte

film 4, firstly, an electrolyte salt is dissolved in a non-aqueous solvent to prepare a non-aqueous electrolyte solution. A matrix polymer is added to this non-aqueous electrolyte solution and sufficiently agitated to dissolve the matrix polymer to obtain a sol electrolyte solution.

Next, a predetermined amount of this electrolyte solution is applied onto the positive electrode active material layer 2a, and cooled down at room temperature so that the matrix polymer is gelatinized. Thus, the gel electrolyte film 4a is formed on the positive electrode active material layer 2a.

It should be noted that the formation method of the gel electrolyte film on the positive electrode ribbon will be detailed later.

Next, the positive electrode ribbon having the gel electrolyte film 4a is cut into a predetermined length. The gel electrolyte film 4a and the positive electrode active material layer 2a of a portion to which a positive electrode lead is to be welded are removed and a lead made from, for example, aluminum is welded here to serve as a positive electrode terminal 7. Thus, a strip positive electrode 2 having the gel electrolyte film 4a is obtained.

Moreover, for the negative electrode 3, a negative electrode composite agent containing a negative electrode active material and a binder is uniformly applied on a metal foil such as a copper foil to serve as the negative electrode collector 3b and dried so as to obtain a negative electrode active material layer 3a. Thus, a negative electrode sheet is ready. The binder contained in the negative electrode composite agent may

be selected from known binders with or without addition of known additives. The negative electrode sheet having the negative electrode active material layer 3a is cut into a predetermined width to obtain a negative electrode ribbon.

Next, the gel electrolyte film 4b is formed on the negative electrode active material layer 3a of the negative electrode ribbon. In order to form the gel electrolyte film 4, firstly, a predetermined amount of the electrolyte solution prepared in the same way as the aforementioned is applied onto the negative electrode active material layer, and cooled down at room temperature so that the matrix polymer is gelatinized. Thus, the gel electrolyte film 4b is formed on the negative electrode active material layer 3a.

It should be noted that the formation method of the gel electrolyte film on the negative electrode ribbon will be detailed later.

Next, the negative electrode ribbon having the gel electrolyte film 4b is cut into a predetermined length. The gel electrolyte film 4b and the negative electrode active material layer 3a of a portion to which a negative electrode lead is to be welded are removed and a lead made from, for example, nickel is welded here to serve as a negative electrode terminal 8. Thus, a strip negative electrode 3 having the gel electrolyte film 4b is obtained.

The strip positive electrode 2 and the strip negative electrode 3 are attached to each other so that the gel electrolyte films 4a and 4b face to each other and pressed to obtain a layered electrode body. Furthermore, this layered electrode body is rolled in the longitudinal direction to obtain a rolled electrode body 5.

Lastly, the rolled electrode body 5 is packed in an exterior film 6 made from an insulation material so that the positive electrode terminal 7 and the negative electrode terminal 8 protrude through the seal portions. Thus, the gel electrolyte cell 1 is complete.

Next, explanation will be given on the formation method of the gel electrolyte film on the positive electrode ribbon and the negative electrode ribbon. It should be noted that explanation will be given on the case of forming the gel electrolyte film on the positive electrode ribbon as an example, but this can applied to the case when forming the gel electrolyte film on the negative electrode ribbon.

Firstly, as shown in Fig. 6 and Fig. 7, a flat plate 10, a carrier 11, and a positive electrode ribbon 12 are placed upon one another in this order. Here, the flat plate 10, the carrier 11, and the positive electrode ribbon 12 are placed so that the center lines, as shown at the line A-B in Fig. 6, in the longitudinal direction of the flat plate 10, the carrier 11, and the positive electrode ribbon 12 are matched with one another.

The flat plate 10 has a width t_3 greater than the width t_1 of the positive electrode ribbon 12 and the width of the gel electrolyte film formed on the positive electrode ribbon 12.

Here, the flat plate 10 may be made from any material if it has adhesion with the gel electrolyte film higher than the adhesion between the carrier 11 and the gel electrolyte film. The flat plate 10 may be made from, for example, metal or glass.

Moreover, the carrier 11 has a width t_2 approximately equal to the width of a gel

electrolyte film 13a formed on the positive electrode ribbon 12. That is, the width t_2 of the carrier 11 is greater than the width t_1 of the positive electrode ribbon 12 and smaller than the width t_3 of the flat plate 10. Moreover, the flat plate 11 has a thickness as small as possible while a desired strength can be obtained.

Here, the material of the carrier 11 is not limited to a particular material under the condition that the adhesion with the gel electrolyte film is lower than the adhesion between the positive electrode ribbon 12 and the gel electrolyte film. The carrier 11 may be preferably made from a material such as metal or synthetic resin.

Next, as shown in Fig. 8 and Fig. 9, the sol electrolyte solution 13 is applied onto the layered flat plate 10, the carrier 11, and the positive electrode ribbon 12. Here, the electrolyte solution 13 is applied so as to have a coating width t_4 greater than the width t_2 of the carrier 11 and smaller than the width t_3 of the flat plate 10.

Next, as shown in Fig. 10 and Fig. 11, with the electrolyte solution 13 applied to the layered flat plate 10, the carrier 11, and the positive electrode ribbon 12, the carrier 11 and the positive electrode ribbon 12 are peeled off from the flat plate 10.

Here, as has been described above, the adhesion between the gel electrolyte film and the flat plate 10 is higher than that between the gel electrolyte film and the carrier 11. Accordingly, the portion of the electrolyte solution 13 on the flat plate 10 and protruding from the carrier 11, i.e., the electrolyte solution 13 coated out of the carrier 11 is adhered to the flat plate 10 and remains there. As a result, on the carrier 11, over the positive electrode ribbon 12 placed on the carrier 11, the electrolyte solution 13

remains with an approximately identical width as the carrier 11.

Next, the sol electrolyte solution 13 applied onto the carrier 11 and the positive electrode ribbon 12 is gelatinized to form the gel electrolyte film 13a.

Lastly, as shown in Fig. 12 and Fig. 13, the positive electrode ribbon 12 and the gel electrolyte film 13a are peeled off from the carrier 11. Here, as has been described above, since the adhesion between the gel electrolyte film 13a and the positive electrode ribbon 12 is higher than that between the gel electrolyte film 13a and the carrier 11, the portion of the gel electrolyte film 13a on the carrier 11 and protruding from the width of the positive electrode ribbon 12, i.e., formed out of the positive electrode ribbon 12 is peeled off from the carrier 11 together with the positive electrode ribbon 12 due to the difference in the adhesion.

As has been described above, the gel electrolyte film 13a is formed on the positive electrode ribbon 12 so as to have a width greater than that of the positive electrode ribbon 12.

In the aforementioned method utilizing the adhesion difference between the flat plate 10, the carrier 11, and the gel electrolyte film 13a, it is possible to form the gel electrolyte film 13a on the positive electrode ribbon 12 with a high accuracy without danger of peeling off of the gel electrolyte film 13a from the positive electrode ribbon 12. Accordingly, in the aforementioned method, there is no danger of removal of the gel electrolyte film 13a which is to remain or mixing of a cut off portion of the gel electrolyte film 13a into the product.

Moreover, in the aforementioned method, the gel electrolyte film 13a is formed with a width approximately identical to the width of the carrier 11. Accordingly, by adjusting the width of the carrier 11, it is possible to obtain a desired width of the gel electrolyte film 13a without difficulty.

It should be noted that while explanation has been given on the embodiment of a cell using a strip positive electrode and a strip negative electrode are layered via a gel electrolyte film and rolled into the longitudinal direction into a rolled electrode body, the present invention is not to be limited to this example. The present invention can also be applied to a case when the strip positive electrode and the strip negative electrode layered via the gel electrolyte film are folded instead of being rolled to obtain an electrode body or to a case when a rectangular positive electrode and a rectangular negative electrode are layered via a gel electrolyte film to obtain a layered electrode body.

Moreover, the gel electrolyte cell 1 according to the aforementioned embodiment is not to be limited to a particular shape such as a circular shape, angular shape and the like. Moreover, the gel electrolyte cell 1 may be a thin type, large-size type, or the like. Moreover, the present invention can be applied to a primary cell as well as to a secondary cell.

Example

In order to confirm the effect of the present invention, a gel electrolyte film was

formed on an electrode ribbon according to the aforementioned method.

Firstly, an electrode ribbon was placed on a carrier in such a manner that their centers in the width directions coincide and rolled into a rolled electrode body.

Here, the carrier used was polypropylene film having a length of 200 m, width of 62 mm, and thickness of 0.05 mm. Moreover, the electrode ribbon had a length of 150 m, width of 60 mm, and thickness of 0.15 mm.

The layered body of the carrier and the electrode ribbon was made to travel along a surface of a coating drum having a width of 100 mm while an electrolyte solution was applied onto the surface of the carrier and the electrode ribbon with a thickness of 20 μm using a doctor blade apparatus. The doctor blade apparatus had a discharge opening width of 70 mm.

That is, the electrolyte solution was applied onto the carrier and the electrode ribbon so as to have a width smaller than the width of the coating drum and greater than the width of the carrier.

When the electrolyte coating is complete and the electrode is removed from the coating drum, the carrier and the electrode ribbon are peeled off from the coating drum. Here, the electrolyte solution of the portion out of the width of the carrier remained on the coating drum surface, which was removed by a scraper in contact with the coating roll.

After that, the electrolyte solution was gelatinized to form a gel electrolyte film and the electrode ribbon was peeled off from the carrier. Thus, a gel electrolyte film

was formed on the electrode ribbon so as to protrude in the width direction by 1.0 mm at both sides.

By forming the gel electrolyte film as has been described above, it was possible to produce a desired gel electrolyte film without removing a gel electrolyte film portion to be left or mixing a cut-off gel film into the product to lower the yield.

Since the present invention utilizes the adhesion difference between the electrode carrier, the first carrier, the second carrier, and the gel electrolyte film, there is no danger of peeling off of the gel electrolyte film from the electrode carrier and it is possible to form a gel electrolyte film on the electrode carrier with a high accuracy. Accordingly, in this invention, there is no danger of removal of a gel electrolyte film portion to be left or mixing of a cut-off gel electrolyte film into the product.

Thus, the present invention can form an excellent electrode and a gel electrolyte cell having a high reliability.

What is Claimed is:

1. In the electrode production method for producing an electrode including a rectangular electrode carrier and a gel electrolyte film formed on the electrode carrier and having a width greater than the electrode carrier, the method comprising of:

an overlaying step for overlaying a first carrier having a greater width than the gel electrolyte film, a second carrier having a width approximately identical to that of the gel electrolyte film, and the electrode carrier in this order,

a coating step for applying an electrolyte composition onto the first carrier, the second carrier, and the electrode carrier which have been put upon one another in the overlaying step, in such a manner that the applied electrolyte composition has a width greater than the width of the second carrier and smaller than the width of the first carrier,

a first peel-off step for peeling off from the first carrier the second carrier and the electrode carrier coated with the gel electrolyte composition in the coating step and overlaid on each other,

a gelling step for forming into a gel electrolyte film the electrolyte composition applied onto the second carrier and the electrode carrier which have been peeled off from the first carrier in the first peel-off step, and

a second peel-off step for peeling off from the second carrier the electrode carrier and the gel electrolyte film gelled in the gelling step.

2. The electrode production method of Claim 1, wherein the electrolyte composition in the coating step is in a sol state.

3. The electrode production method of Claim 2, wherein the electrolyte composition contains an electrolyte salt, matrix polymer, and a swelling solvent.

4. The electrode production method of Claim 3, wherein the electrolyte salt is further defined as being selected from the group consisting of LiPF_6 , LiAsF_6 , LiClO_4 , LiCF_3SO_3 , $\text{Li}(\text{CF}_3\text{SO}_2)_2\text{N}$, and $\text{LiC}_4\text{F}_9\text{SO}_3$.

5. The electrode production method of Claim 3, wherein the matrix polymer is further defined as being selected from the group consisting of polyacrylonitrile, polyvinylidene fluoride, polytetrafluoroethylene, polyhexafluoropropylene, polyethylene oxide, polypropylene oxide, polyphosphazene, polysiloxane, polyvinyl acetate, polyvinyl alcohol, polymethyl methacrylate, polyacrylic acid, polymethacrylic acid, styrene-butadiene rubber, nitrile-butadiene rubber, polystyrene, and polycarbonate.

6. The electrode production method of Claim 3, wherein the swelling solvent is further defined as being selected from the group consisting of ethylene carbonate, propylene carbonate, butylene carbonate, γ -butyrolactone, γ -valerolactone,

diethoxyethane, tetrahydrofuran, 2-methyl tetrahydrofuran, 1, 3-dioxane, methyl acetate, methyl propionate, dimethyl carbonate, diethyl carbonate, and ethylmethyl carbonate.

7. The electrode production method of Claim 1, wherein in the first peel-off step, the first carrier has the adhesion with the electrolyte composition higher than the adhesion between the second carrier and the electrolyte composition.

8. The electrode production method of Claim 1, wherein in the second peel-off step, the second carrier has the adhesion with the gel electrolyte film lower than the adhesion between the electrode carrier and the gel electrolyte film.

9. The electrode production method of Claim 8, wherein the second carrier consists of a synthetic resin.

10. The electrode production method of Claim 9, wherein the synthetic resin consists of propylene.

11. In the gel electrolyte cell production method using an electrode including a rectangular electrode carrier and a gel electrolyte film formed on the electrode carrier and having a width greater than the electrode carrier, the electrode being produced by:

an overlaying step for overlaying a first carrier having a greater width than the gel electrolyte film, a second carrier having a width approximately identical to that of the gel electrolyte film, and the electrode carrier in this order,

a coating step for applying an electrolyte composition onto the first carrier, the second carrier, and the electrode carrier which have been put upon one another in the overlaying step, in such a manner that the applied electrolyte composition has a width greater than the width of the second carrier and smaller than the width of the first carrier,

a first peel-off step for peeling off from the first carrier the second carrier and the electrode carrier coated with the gel electrolyte composition in the coating step and overlaid on each other,

a gelling step for forming into a gel electrolyte film the electrolyte composition applied onto the second carrier and the electrode carrier which have been peeled off from the first carrier in the first peel-off step, and

a second peel-off step for peeling off from the second carrier the electrode carrier and the gel electrolyte film gelled in the gelling step.

12. The gel electrolyte cell production method of Claim 11, wherein the electrolyte composition in the coating step is in a sol state.

13. The gel electrolyte cell production method of Claim 12, wherein the

[illegible]

15. The gel electrolyte cell production method of Claim 13, wherein the matrix polymer is further defined as being selected from the group consisting of polyacrylonitrile, polyvinylidene fluoride, polytetrafluoroethylene, polyhexafluoropropylene, polyethylene oxide, polypropylene oxide, polyphosphazene, polysiloxane, polyvinyl acetate, polyvinyl alcohol, polymethyl methacrylate, polyacrylic acid, polymethacrylic acid, styrene-butadiene rubber, nitrile-butadiene rubber, polystyrene, and polycarbonate.

24

17. The gel electrolyte cell production method of Claim 11, wherein in the first peel-off step, the first carrier has the adhesion with the electrolyte composition higher than the adhesion between the second carrier and the electrolyte composition.

18. The gel electrolyte cell production method of Claim 11, wherein in the second peel-off step, the second carrier has the adhesion with the gel electrolyte film lower than the adhesion between the electrode carrier and the gel electrolyte film.

19. The gel electrolyte cell production method of Claim 18, wherein the second carrier consists of a synthetic resin.

20. The gel electrolyte cell production method of Claim 19, wherein the synthetic resin consists of propylene.

21. An electrode produced by the method of Claim 1.

22. A gel electrolyte cell comprising of the electrode of Claim 21.

23. A gel electrolyte cell of Claim 22, wherein the positive electrode and the negative electrode are cut into predetermined lengths each other, and attached to each other so that the gel electrolyte film faces to each other, and rolled in the longitudinal

direction, and packed in an exterior film made from an insulation material.

24. A gel electrolyte cell of Claim 23, wherein a positive electrode lead is welded on the positive electrode and a negative electrode lead is welded on the negative electrode, and these leads protrude through the seal portions of the exterior film.

Figure 1 consists of 12 histograms arranged in a single column. Each histogram represents the distribution of the number of non-zero elements in the vector x for a specific value of n . The x-axis for all histograms is labeled 'x' and ranges from 0 to 120. The y-axis is labeled 'count' and ranges from 0 to 100. The histograms are for $n = 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120$. As n increases, the distribution of x becomes more concentrated around zero, with the peak count increasing significantly.

Figure 1 consists of 12 histograms arranged in a single column. Each histogram represents the distribution of the number of non-zero elements in the vector x for a specific value of n . The x-axis for all histograms is labeled 'x' and ranges from 0 to 120. The y-axis is labeled 'count' and ranges from 0 to 100. The histograms are for $n = 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120$. As n increases, the distribution of x becomes more concentrated around zero, with the peak count increasing significantly.

00001-1-1000

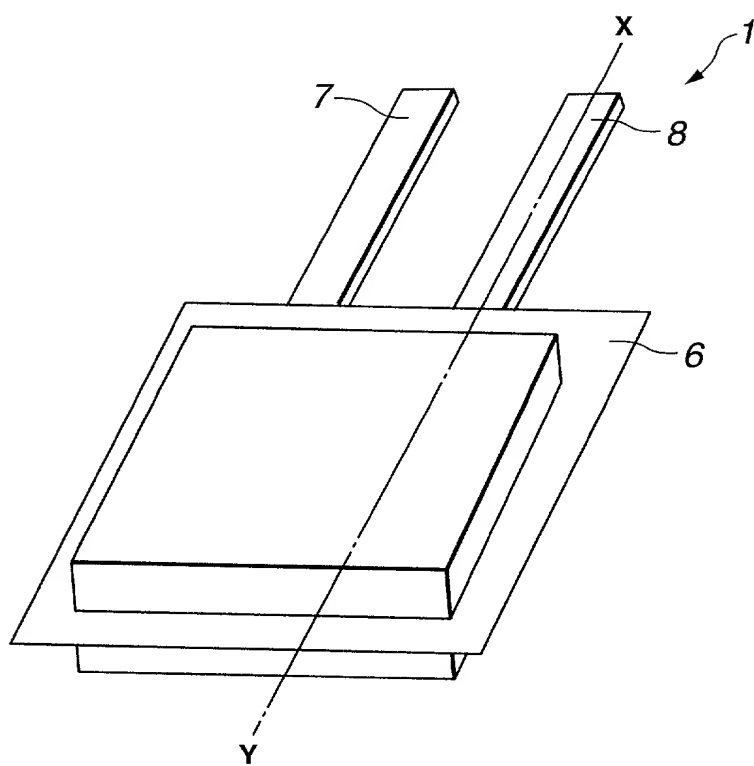


FIG.1

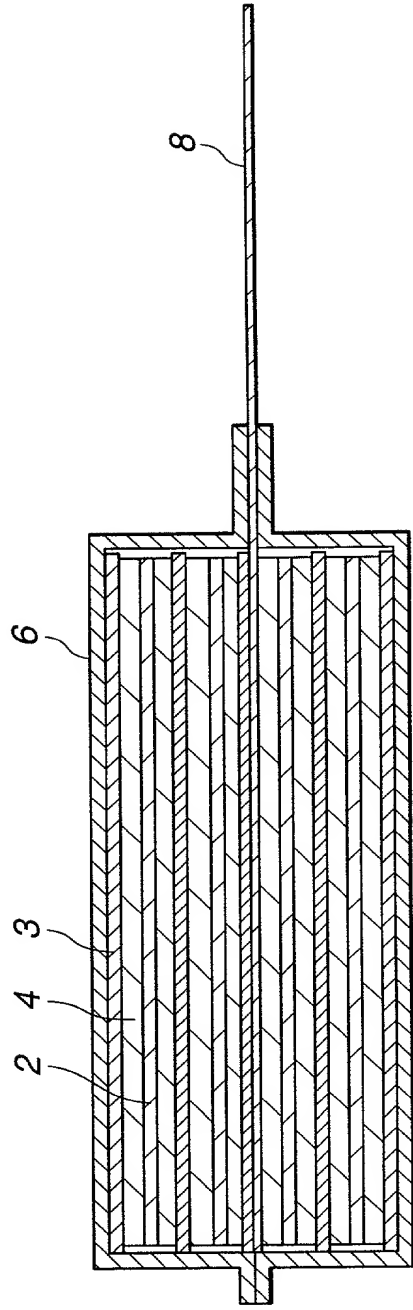


FIG.2

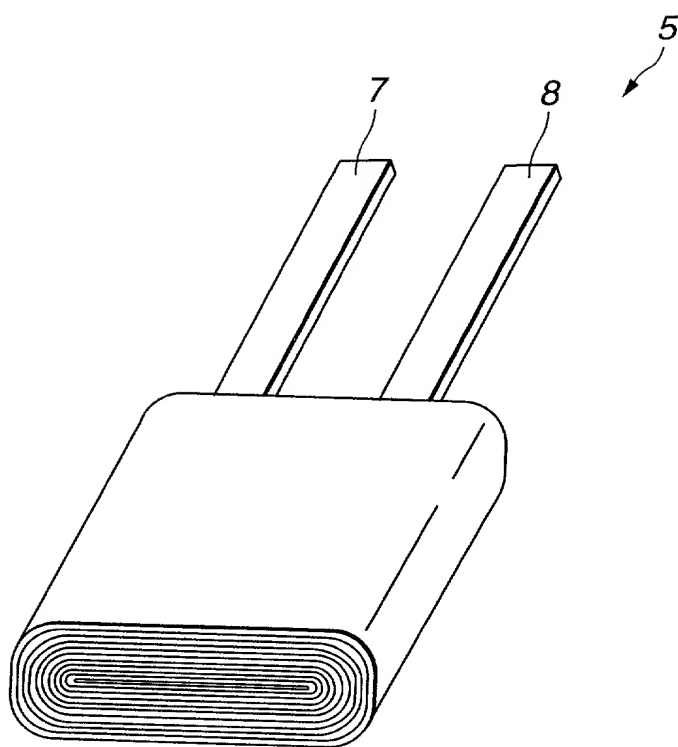


FIG.3

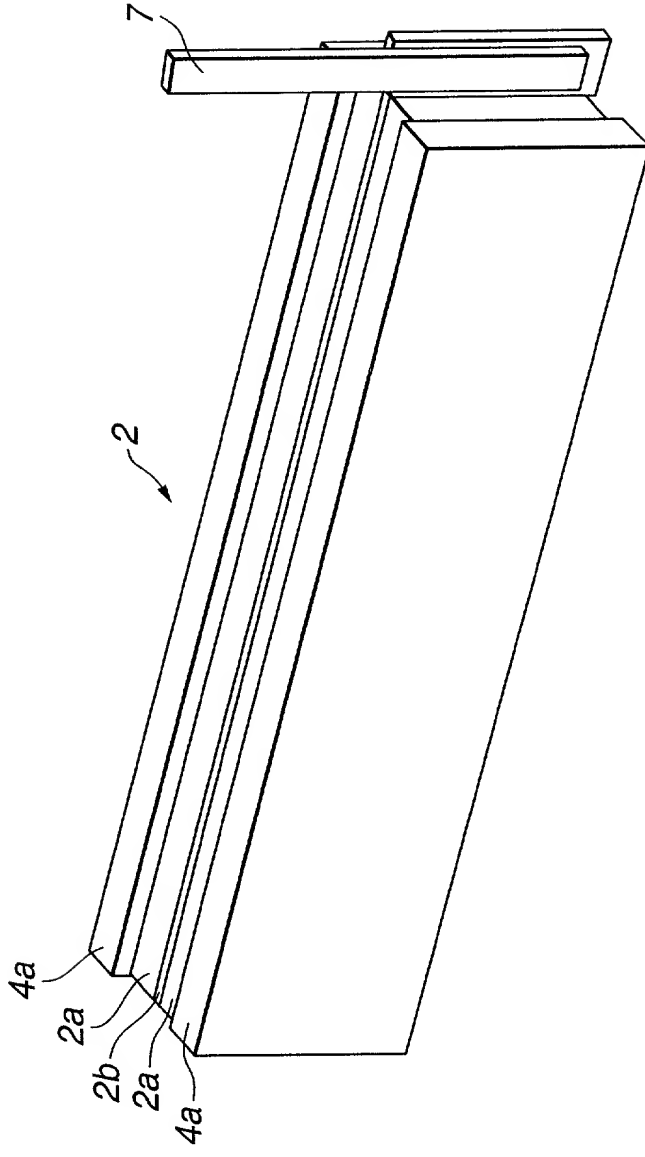


FIG. 4

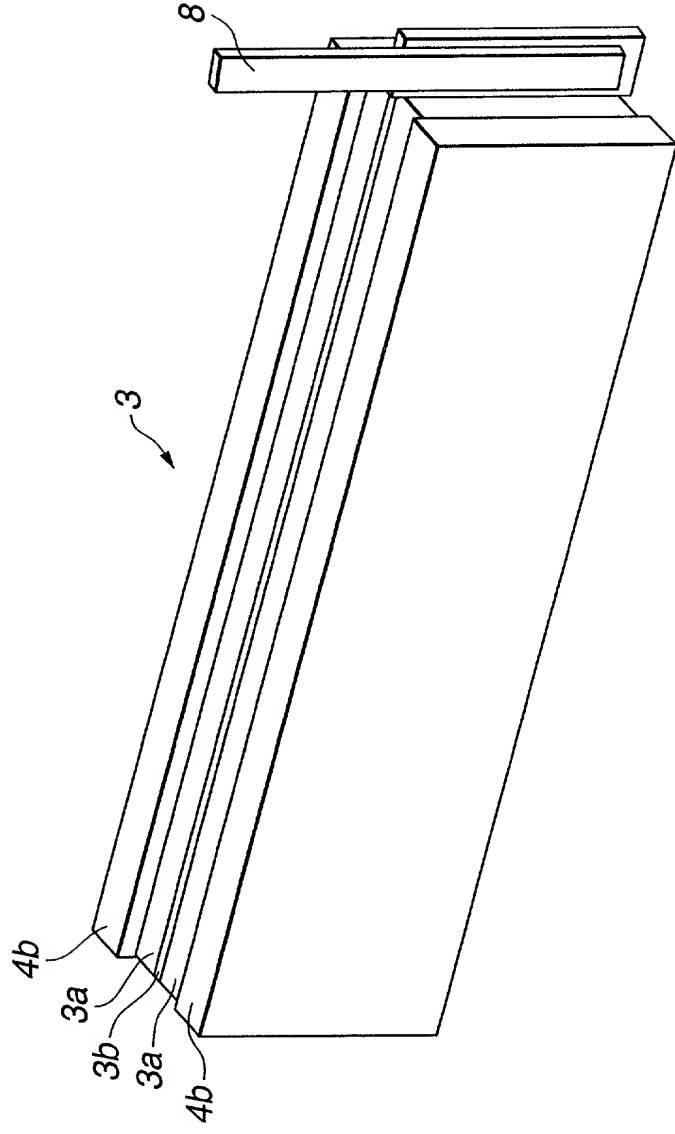


FIG. 5

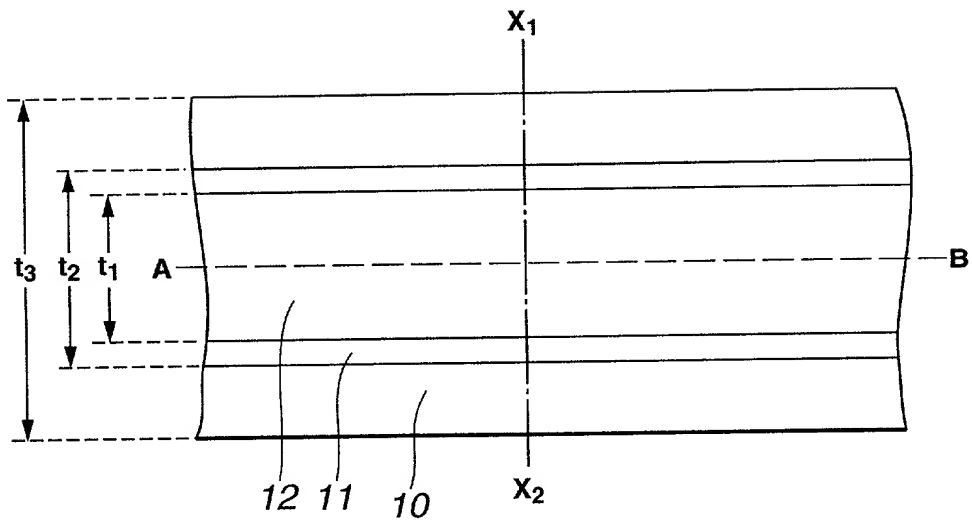


FIG. 6

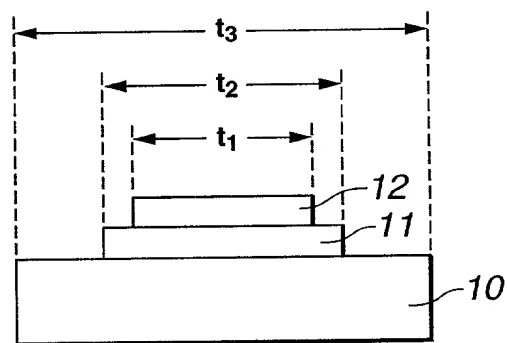


FIG. 7

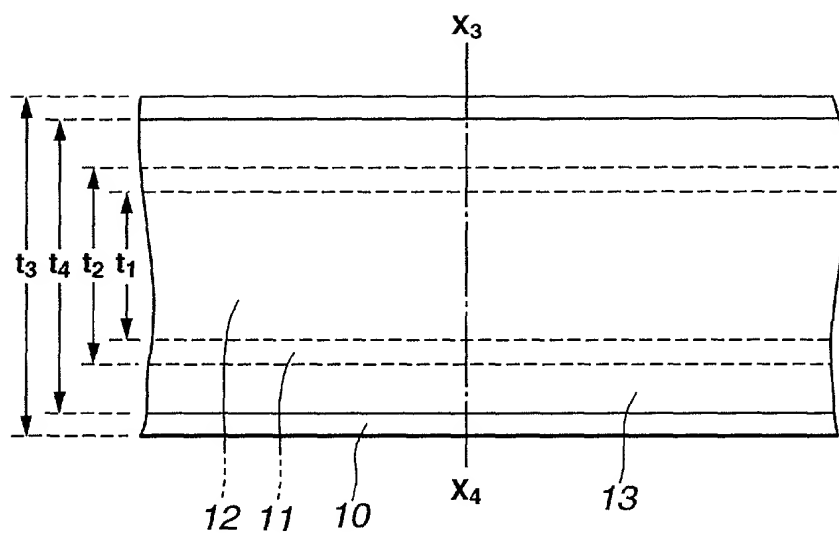


FIG. 8

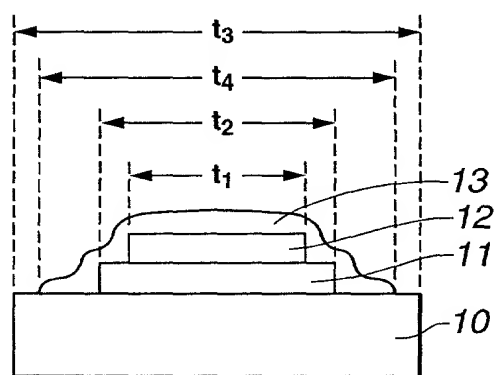


FIG. 9

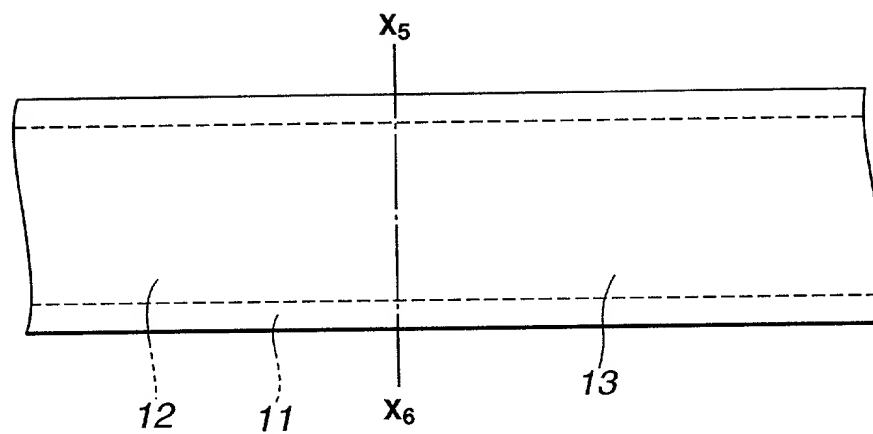
[illegible]

FIG.10

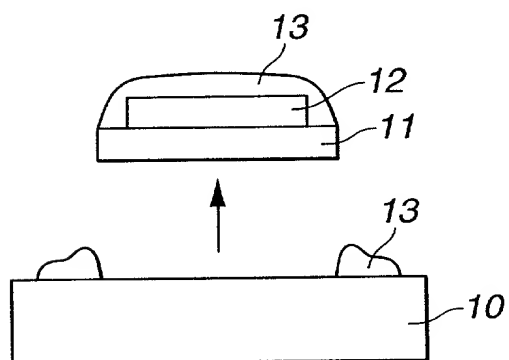


FIG.11

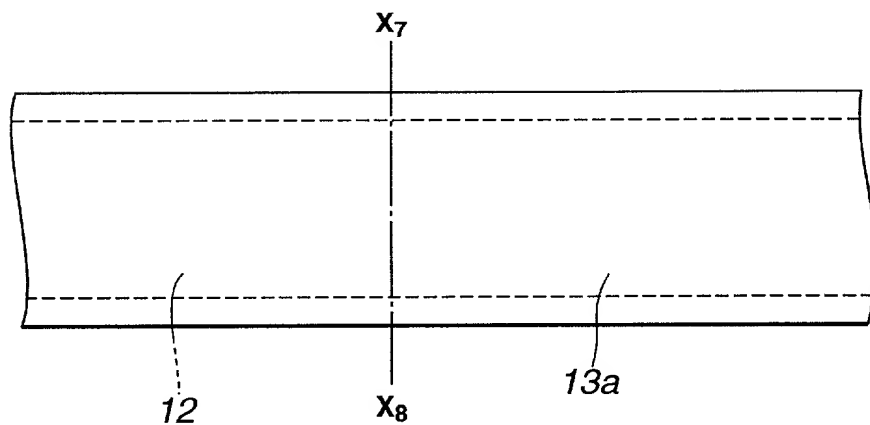


FIG. 12




FIG. 13

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
（該当する場合）____に訂正されました。

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"ELECTRODE AND GEL ELECTRIC CELL PRODUCTION METHOD"

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

1. **THE**
 2. **THE**
 3. **THE**
 4. **THE**
 5. **THE**
 6. **THE**
 7. **THE**
 8. **THE**
 9. **THE**
 10. **THE**
 11. **THE**
 12. **THE**
 13. **THE**
 14. **THE**
 15. **THE**
 16. **THE**
 17. **THE**
 18. **THE**
 19. **THE**
 20. **THE**
 21. **THE**
 22. **THE**
 23. **THE**
 24. **THE**
 25. **THE**
 26. **THE**
 27. **THE**
 28. **THE**
 29. **THE**
 30. **THE**
 31. **THE**
 32. **THE**
 33. **THE**
 34. **THE**
 35. **THE**
 36. **THE**
 37. **THE**
 38. **THE**
 39. **THE**
 40. **THE**
 41. **THE**
 42. **THE**
 43. **THE**
 44. **THE**
 45. **THE**
 46. **THE**
 47. **THE**
 48. **THE**
 49. **THE**
 50. **THE**
 51. **THE**
 52. **THE**
 53. **THE**
 54. **THE**
 55. **THE**
 56. **THE**
 57. **THE**
 58. **THE**
 59. **THE**
 60. **THE**
 61. **THE**
 62. **THE**
 63. **THE**
 64. **THE**
 65. **THE**
 66. **THE**
 67. **THE**
 68. **THE**
 69. **THE**
 70. **THE**
 71. **THE**
 72. **THE**
 73. **THE**
 74. **THE**
 75. **THE**
 76. **THE**
 77. **THE**
 78. **THE**
 79. **THE**
 80. **THE**
 81. **THE**
 82. **THE**
 83. **THE**
 84. **THE**
 85. **THE**
 86. **THE**
 87. **THE**
 88. **THE**
 89. **THE**
 90. **THE**
 91. **THE**
 92. **THE**
 93. **THE**
 94. **THE**
 95. **THE**
 96. **THE**
 97. **THE**
 98. **THE**
 99. **THE**
 100. **THE**

Priority Not Claimed

外国での先行出願

優先権主張なし

P11-318434	Japan	November 9, 1999
------------	-------	------------------

(Number) (番号)	(Country) (国名)	(Day Month Year Filed) (出願年月日)
1	USA	1998 01 01
2	USA	1998 02 01
3	USA	1998 03 01
4	USA	1998 04 01
5	USA	1998 05 01
6	USA	1998 06 01
7	USA	1998 07 01
8	USA	1998 08 01
9	USA	1998 09 01
10	USA	1998 10 01
11	USA	1998 11 01
12	USA	1998 12 01
13	USA	1999 01 01
14	USA	1999 02 01
15	USA	1999 03 01
16	USA	1999 04 01
17	USA	1999 05 01
18	USA	1999 06 01
19	USA	1999 07 01
20	USA	1999 08 01
21	USA	1999 09 01
22	USA	1999 10 01
23	USA	1999 11 01
24	USA	1999 12 01
25	USA	2000 01 01
26	USA	2000 02 01
27	USA	2000 03 01
28	USA	2000 04 01
29	USA	2000 05 01
30	USA	2000 06 01
31	USA	2000 07 01
32	USA	2000 08 01
33	USA	2000 09 01
34	USA	2000 10 01
35	USA	2000 11 01
36	USA	2000 12 01
37	USA	2001 01 01
38	USA	2001 02 01
39	USA	2001 03 01
40	USA	2001 04 01
41	USA	2001 05 01
42	USA	2001 06 01
43	USA	2001 07 01
44	USA	2001 08 01
45	USA	2001 09 01
46	USA	2001 10 01
47	USA	2001 11 01
48	USA	2001 12 01
49	USA	2002 01 01
50	USA	2002 02 01
51	USA	2002 03 01
52	USA	2002 04 01
53	USA	2002 05 01
54	USA	2002 06 01
55	USA	2002 07 01
56	USA	2002 08 01
57	USA	2002 09 01
58	USA	2002 10 01
59	USA	2002 11 01
60	USA	2002 12 01
61	USA	2003 01 01
62	USA	2003 02 01
63	USA	2003 03 01
64	USA	2003 04 01
65	USA	2003 05 01
66	USA	2003 06 01
67	USA	2003 07 01
68	USA	2003 08 01
69	USA	2003 09 01
70	USA	2003 10 01
71	USA	2003 11 01
72	USA	2003 12 01
73	USA	2004 01 01
74	USA	2004 02 01
75	USA	2004 03 01
76	USA	2004 04 01
77	USA	2004 05 01
78	USA	2004 06 01
79	USA	2004 07 01
80	USA	2004 08 01
81	USA	2004 09 01
82	USA	2004 10 01
83	USA	2004 11 01
84	USA	2004 12 01
85	USA	2005 01 01
86	USA	2005 02 01
87	USA	2005 03 01
88	USA	2005 04 01
89	USA	2005 05 01
90	USA	2005 06 01
91	USA	2005 07 01
92	USA	2005 08 01
93	USA	2005 09 01
94	USA	2005 10 01
95	USA	2005 11 01
96	USA	2005 12 01
97	USA	2006 01 01
98	USA	2006 02 01
99	USA	2006 03 01
100	USA	2006 04 01

(Number)	(Country)	(Day Month Year Filed)
1	USA	15 01 2018
2	USA	15 01 2018
3	USA	15 01 2018
4	USA	15 01 2018
5	USA	15 01 2018
6	USA	15 01 2018
7	USA	15 01 2018
8	USA	15 01 2018
9	USA	15 01 2018
10	USA	15 01 2018
11	USA	15 01 2018
12	USA	15 01 2018
13	USA	15 01 2018
14	USA	15 01 2018
15	USA	15 01 2018
16	USA	15 01 2018
17	USA	15 01 2018
18	USA	15 01 2018
19	USA	15 01 2018
20	USA	15 01 2018
21	USA	15 01 2018
22	USA	15 01 2018
23	USA	15 01 2018
24	USA	15 01 2018
25	USA	15 01 2018
26	USA	15 01 2018
27	USA	15 01 2018
28	USA	15 01 2018
29	USA	15 01 2018
30	USA	15 01 2018
31	USA	15 01 2018
32	USA	15 01 2018
33	USA	15 01 2018
34	USA	15 01 2018
35	USA	15 01 2018
36	USA	15 01 2018
37	USA	15 01 2018
38	USA	15 01 2018
39	USA	15 01 2018
40	USA	15 01 2018
41	USA	15 01 2018
42	USA	15 01 2018
43	USA	15 01 2018
44	USA	15 01 2018
45	USA	15 01 2018
46	USA	15 01 2018
47	USA	15 01 2018
48	USA	15 01 2018
49	USA	15 01 2018
50	USA	15 01 2018
51	USA	15 01 2018
52	USA	15 01 2018
53	USA	15 01 2018
54	USA	15 01 2018
55	USA	15 01 2018
56	USA	15 01 2018
57	USA	15 01 2018
58	USA	15 01 2018
59	USA	15 01 2018
60	USA	15 01 2018
61	USA	15 01 2018
62	USA	15 01 2018
63	USA	15 01 2018
64	USA	15 01 2018
65	USA	15 01 2018
66	USA	15 01 2018
67	USA	15 01 2018
68	USA	15 01 2018
69	USA	15 01 2018
70	USA	15 01 2018
71	USA	15 01 2018
72	USA	15 01 2018
73	USA	15 01 2018
74	USA	15 01 2018
75	USA	15 01 2018
76	USA	15 01 2018
77	USA	15 01 2018
78	USA	15 01 2018
79	USA	15 01 2018
80	USA	15 01 2018
81	USA	15 01 2018
82	USA	15 01 2018
83	USA	15 01 2018
84	USA	15 01 2018
85	USA	15 01 2018
86	USA	15 01 2018
87	USA	15 01 2018
88	USA	15 01 2018
89	USA	15 01 2018
90	USA	15 01 2018
91	USA	15 01 2018
92	USA	15 01 2018
93	USA	15 01 2018
94	USA	15 01 2018
95	USA	15 01 2018
96	USA	15 01 2018
97	USA	15 01 2018
98	USA	15 01 2018
99	USA	15 01 2018
100	USA	15 01 2018

(Number)	(Country)	(Day Month Year Filed)
(番号)	(国名)	(出願年月日)
1	USA	1998 01 15
2	USA	1998 01 15
3	USA	1998 01 15
4	USA	1998 01 15
5	USA	1998 01 15
6	USA	1998 01 15
7	USA	1998 01 15
8	USA	1998 01 15
9	USA	1998 01 15
10	USA	1998 01 15
11	USA	1998 01 15
12	USA	1998 01 15
13	USA	1998 01 15
14	USA	1998 01 15
15	USA	1998 01 15
16	USA	1998 01 15
17	USA	1998 01 15
18	USA	1998 01 15
19	USA	1998 01 15
20	USA	1998 01 15
21	USA	1998 01 15
22	USA	1998 01 15
23	USA	1998 01 15
24	USA	1998 01 15
25	USA	1998 01 15
26	USA	1998 01 15
27	USA	1998 01 15
28	USA	1998 01 15
29	USA	1998 01 15
30	USA	1998 01 15
31	USA	1998 01 15
32	USA	1998 01 15
33	USA	1998 01 15
34	USA	1998 01 15
35	USA	1998 01 15
36	USA	1998 01 15
37	USA	1998 01 15
38	USA	1998 01 15
39	USA	1998 01 15
40	USA	1998 01 15
41	USA	1998 01 15
42	USA	1998 01 15
43	USA	1998 01 15
44	USA	1998 01 15
45	USA	1998 01 15
46	USA	1998 01 15
47	USA	1998 01 15
48	USA	1998 01 15
49	USA	1998 01 15
50	USA	1998 01 15
51	USA	1998 01 15
52	USA	1998 01 15
53	USA	1998 01 15
54	USA	1998 01 15
55	USA	1998 01 15
56	USA	1998 01 15
57	USA	1998 01 15
58	USA	1998 01 15
59	USA	1998 01 15
60	USA	1998 01 15
61	USA	1998 01 15
62	USA	1998 01 15
63	USA	1998 01 15
64	USA	1998 01 15
65	USA	1998 01 15
66	USA	1998 01 15
67	USA	1998 01 15
68	USA	1998 01 15
69	USA	1998 01 15
70	USA	1998 01 15
71	USA	1998 01 15
72	USA	1998 01 15
73	USA	1998 01 15
74	USA	1998 01 15
75	USA	1998 01 15
76	USA	1998 01 15
77	USA	1998 01 15
78	USA	1998 01 15
79	USA	1998 01 15
80	USA	1998 01 15
81	USA	1998 01 15
82	USA	1998 01 15
83	USA	1998 01 15
84	USA	1998 01 15
85	USA	1998 01 15
86	USA	1998 01 15
87	USA	1998 01 15
88	USA	1998 01 15
89	USA	1998 01 15
90	USA	1998 01 15
91	USA	1998 01 15
92	USA	1998 01 15
93	USA	1998 01 15
94	USA	1998 01 15
95	USA	1998 01 15
96	USA	1998 01 15
97	USA	1998 01 15
98	USA	1998 01 15
99	USA	1998 01 15
100	USA	1998 01 15

(Number)	(Country)	(Day Month Year Filed)
1	USA	15 01 2018
2	USA	15 01 2018
3	USA	15 01 2018
4	USA	15 01 2018
5	USA	15 01 2018
6	USA	15 01 2018
7	USA	15 01 2018
8	USA	15 01 2018
9	USA	15 01 2018
10	USA	15 01 2018
11	USA	15 01 2018
12	USA	15 01 2018
13	USA	15 01 2018
14	USA	15 01 2018
15	USA	15 01 2018
16	USA	15 01 2018
17	USA	15 01 2018
18	USA	15 01 2018
19	USA	15 01 2018
20	USA	15 01 2018
21	USA	15 01 2018
22	USA	15 01 2018
23	USA	15 01 2018
24	USA	15 01 2018
25	USA	15 01 2018
26	USA	15 01 2018
27	USA	15 01 2018
28	USA	15 01 2018
29	USA	15 01 2018
30	USA	15 01 2018
31	USA	15 01 2018
32	USA	15 01 2018
33	USA	15 01 2018
34	USA	15 01 2018
35	USA	15 01 2018
36	USA	15 01 2018
37	USA	15 01 2018
38	USA	15 01 2018
39	USA	15 01 2018
40	USA	15 01 2018
41	USA	15 01 2018
42	USA	15 01 2018
43	USA	15 01 2018
44	USA	15 01 2018
45	USA	15 01 2018
46	USA	15 01 2018
47	USA	15 01 2018
48	USA	15 01 2018
49	USA	15 01 2018
50	USA	15 01 2018
51	USA	15 01 2018
52	USA	15 01 2018
53	USA	15 01 2018
54	USA	15 01 2018
55	USA	15 01 2018
56	USA	15 01 2018
57	USA	15 01 2018
58	USA	15 01 2018
59	USA	15 01 2018
60	USA	15 01 2018
61	USA	15 01 2018
62	USA	15 01 2018
63	USA	15 01 2018
64	USA	15 01 2018
65	USA	15 01 2018
66	USA	15 01 2018
67	USA	15 01 2018
68	USA	15 01 2018
69	USA	15 01 2018
70	USA	15 01 2018
71	USA	15 01 2018
72	USA	15 01 2018
73	USA	15 01 2018
74	USA	15 01 2018
75	USA	15 01 2018
76	USA	15 01 2018
77	USA	15 01 2018
78	USA	15 01 2018
79	USA	15 01 2018
80	USA	15 01 2018
81	USA	15 01 2018
82	USA	15 01 2018
83	USA	15 01 2018
84	USA	15 01 2018
85	USA	15 01 2018
86	USA	15 01 2018
87	USA	15 01 2018
88	USA	15 01 2018
89	USA	15 01 2018
90	USA	15 01 2018
91	USA	15 01 2018
92	USA	15 01 2018
93	USA	15 01 2018
94	USA	15 01 2018
95	USA	15 01 2018
96	USA	15 01 2018
97	USA	15 01 2018
98	USA	15 01 2018
99	USA	15 01 2018
100	USA	15 01 2018

私は、第35編米国法典119条(e)項に基いて下記の米
国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (Filing Date)
 [出願番号] [出願日]

(Application No.)	(Filing Date)
出願番号	出願日

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or 365(c) of an PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: patented, pending, abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: patented, pending, abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

David R. Metzger (Reg. No. 32,919), Joseph A. Mahoney (Reg. No. 38,956), Howard B. Rockman (Reg. No. 22,190), Jordan A. Sigale, (Reg. No. 39,028), Michael A. Molano (Reg. No. 39,777), Michael L. Kiklis (Reg. No. 38,939), Janelle D. Strode (Reg. No. 34,738), Kevin W. Guynn (Reg. No. 29,972), Jennifer Hammond (Reg. No. 41,814), Lana Knedlik (Reg. No. 42,748), John F. Griffith (Reg. No. 44,137), Marina Saito (Reg. No. 42,121), Alison P. Schwartz (Reg. No. 43,863), Christopher P. Rauch (Reg. No. 45,034), Francisco Rubio-Campos (Reg. No. 45,358), Brian J. Gill (Reg. No. 46,727) and Shashank S. Upadhye, all members of the firm of Sonnenschein, Nath & Rosenthal

Send Correspondence to:

書類送付先

David R. Metzger
Sonnenschein Nath & Rosenthal
P.O. Box #061080
Wacker Drive Station
Chicago, Illinois 60606-1080

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

312/876-2578

Japanese Language Declaration

(日本語宣言書)

唯一または第一発明者名	Full name of sole or first inventor: ETSUSHI YAJIMA
発明者の署名 日付	Inventor's signature Date
住所	Residence Fukushima, Japan
国籍	Citizenship Japan
私書箱	Post Office Address c/o Sony Energytec, Inc. 1-1, Aza-Shimosugishita, Takakura
	Hiwada-cho, Koriyama-shi, Fukushima, Japan

(第三以降の共同発明者についても同様に記載し、署名をする
こと)

第二共同発明者	Full name of second joint inventor, if any: TSUYOSHI SUGIYAMA
発明者の署名 日付	Inventor's signature Date
住所	Residence Miyagi, Japan
国籍	Citizenship Japan
私書箱	Post Office Address C/o Sony Corporation 7-35, Kitashinagawa 6-chome
	Shinagawa-ku, Tokyo 141, Japan
第二共同発明者	Full name of third joint inventor, if any: KAZUHIKO SOJI
発明者の署名 日付	Inventor's signature Date
住所	Residence Fukushima, Japan
国籍	Citizenship Japan
私書箱	Post Office Address C/o Sony Corporation 7-35, Kitashinagawa 6- chome
	Shinagawa-ku, Tokyo 141, Japan

Japanese Language Declaration

(日本語宣言書)